

**Spiralfeder Türbänder Fridavo,
 einseitig wirkend.**


18.1760. . . Stahl blank (130)

18.1762. . . Stahl verzinkt passiviert (136B)


18.1764. . . Edelstahl rostfrei, gebürstet (139A) 

Code	GL mm Gewerbelänge	Grösse	TB mm Türbreite	TH mm Türhöhe	TD mm Türdicke	D mm Falzlufte	A mm	TG max. Türgewicht
075F	75	0	610	1800	18-25	6	15	15 Kg
100F	100	1	735	1900	25-30	6	15	22 Kg
125F	125	5	735	2000	30-35	6	16	27 Kg
150F	150	9	735	2500	35-40	8	17	40 Kg
175F	175	13	860	2500	40-45	9	18	55 Kg
200F	200	17	985	2600	45-50	9,5	20	70 Kg
250F*	250	21	985	2800	50-60	9,5	23	100 Kg

* nicht ab Lager lieferbar!



18.1760./18.1762./18.1764.




**Spiralfeder Pendeltürbänder Fridavo,
 doppelt wirkend.**

18.1767. . . Stahl verzinkt passiviert (126B)


18.1769. . . Edelstahl rostfrei, gebürstet (129A) 

Code	GL mm Gewerbelänge	Grösse	TB mm Türbreite	TH mm Türhöhe	TD mm Türdicke	D mm Falzlufte	A mm	TG max. Türgewicht
075F	75	29	610	1800	18-25	10	15	15 Kg
100F	100	30	735	1900	25-30	10	15	22 Kg
125F	125	33	735	2000	30-35	11	16	27 Kg
150F	150	36	735	2500	35-40	12	17	40 Kg
175F	175	39	860	2500	40-45	15	18	55 Kg
200F	200	42	985	2600	45-50	17	20	70 Kg
250F*	250	45	985	2800	50-60	19	23	100 Kg

* nicht in 18.1769. Edelstahl rostfrei, ab Lager lieferbar!



18.1767./18.1769.



**Ersatzfedern für Spiralfeder-
 Türbänder und Pendeltürbänder Fridavo.**

18.1772. . . Stahl blank (150)

18.1774. . . Edelstahl rostfrei (150) 

Code	075F	100F	125F	150F	175F	200F	250F
Für Gewerbelänge	75	100	125	150	175	200	250 mm

Einseitig wirkend

Grösse:	0	1	5	9	13	17	21
---------	---	---	---	---	----	----	----


Doppelt wirkend

Grösse:	29	30	33	36	39	42	45
---------	----	----	----	----	----	----	----

Länge:	55	80	100	125	145	170	190 mm
--------	----	----	-----	-----	-----	-----	--------


Ø D :	17	18	19	22	25	28	32 mm
-------	----	----	----	----	----	----	-------

Info: Stellnieten auf Anfrage



18.1772./18.1774.

**Montage-
 Hinweis**

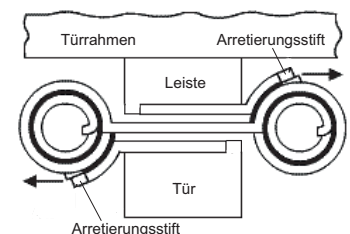

Technische Änderungen vorbehalten !