

**Feuerwehr-Karabinerhaken**

Edelstahl, Werkstoff V4A, DIN 5299 Form C



53.9980. . .

Code	Grösse	Maulweite	Tragfähigkeit
0505	50 x 5 mm	7 mm	100 kg
0606	60 x 6 mm	8 mm	120 kg
0707	70 x 7 mm	8 mm	180 kg
0808	80 x 8 mm	9 mm	230 kg
1010	100 x 10 mm	11 mm	350 kg



53.9980.


**Ketten-Schnellverschlüsse**

Edelstahl, Werkstoff V4A, verschraubbar



53.9982. . .

Code	Grösse	Maulweite	Tragfähigkeit
204	40 x 4 mm	5,5 mm	180 kg
207	65 x 7 mm	8,0 mm	600 kg
208	75 x 8 mm	10,0 mm	700 kg
210	90 x 10 mm	12,0 mm	1000 kg



53.9982.

**Schraubglieder Rapid**

EU-Qualität Sicherheitsfaktor 5 - Alsi 316 - A4



53.9984. . .

Code	Grösse	Maulweite	Tragfähigkeit
0404	40 x 4 mm	5,5 mm	280 kg
0505	50 x 5 mm	6,5 mm	450 kg
0606	60 x 6 mm	7,5 mm	650 kg
0707	70 x 7 mm	8,5 mm	900 kg
0808	80 x 8 mm	10,0 mm	1100 kg
1010	100 x 10 mm	12,0 mm	1800 kg




53.9984.

**Lasthaken mit Wirbel**

mit Sicherheitsfalle System Grad 80, hochfester Stahl,  
 Stahlteile lackiert, Falle verzinkt

53.1938. . .

Code	für Kette	Masse in mm					Nutzlast
		A	B	C	D	E	
100	∅ 6 mm	168	132	26	20	26	1000 kg
150	∅ 7 mm	218	173	31	26	34	1500 kg
200	∅ 8 mm	227	178	33	27	36	2000 kg
320	∅ 10 mm	260	200	42	35	38	3200 kg
500	∅ 13 mm	365	292	47	45	60	5000 kg




53.1938.

**Lasthaken**

mit Sicherheitsklinke roh, im Gesenk geschmiedet.

53.1941. . .

Code	A	B	C	D	E	F	B in kp
150	12	104	25	28	25	19	1500
200	15	119	29	31	28	22	2000
300	17	146	37	39	34	30	3000
500	23	187	46	50	42	35	5000

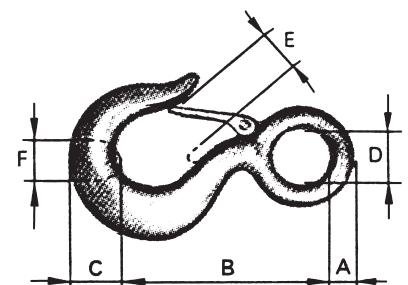

53.1941.